
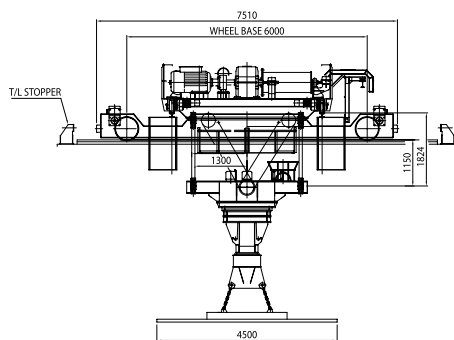


OVER HEAD CRANE_Crane

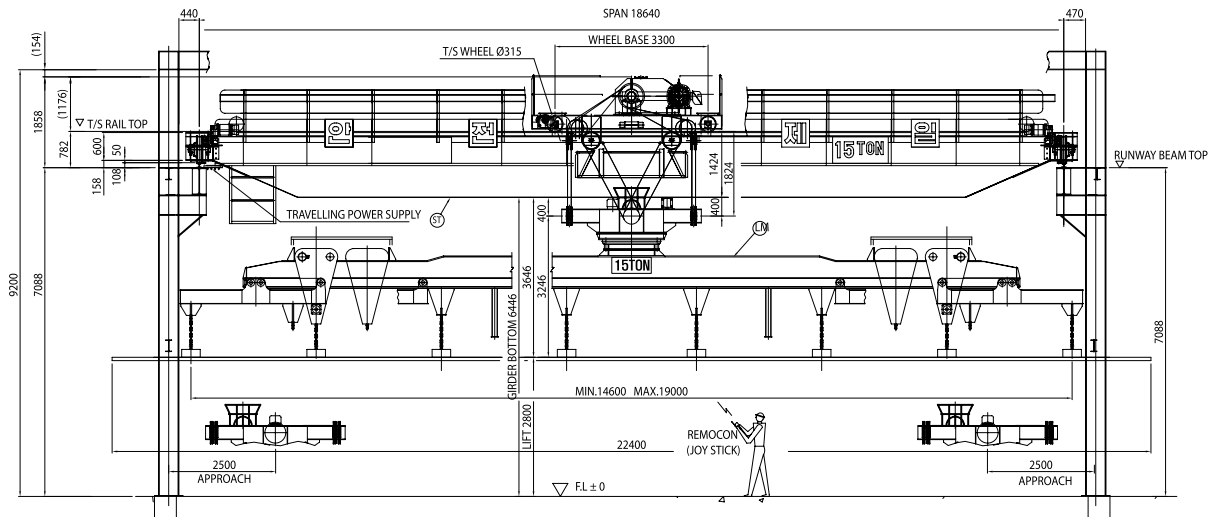

CAPACITY	15TON(MAGANET UNDER)			
TEST LOAD	16.5TON			
LIFT	2.8m			
SPAN	18.64m			
	SPEED(m/min)	MOTOR	BRAKE + CONTROL	
HOISTING	5	45kW X 6P	A,C-D,C MAGNET + INVETER	
TRAVERSING	25	2-2.2kW X 4P	MAGNET DISC + INVERTER	
TRAVELLING	40	4-3.7kW X 4P	MAGNET DISC + INVERTER	
SLEWING	0.75rpm	3.7kW X 4P(i=1/385)	MAGNET DISC	
RAIL	T/S	30kg/m	T/L	30kg/m
WIRE ROPE	14, 35 X 07(WA), C, UNROTATION ROPE, 16 PARTS			
OPERATION	REMOCON(JOY STICK)			
POWER	AC380V, 60HZ, 3PHASE			
TRAVELLING LENGTH	87m			