



TIM 55

**280A Whitton Avenue East Greenford Middx UB6 0JP
London United Kingdom**

Tel: +44 (0) 203475 6819 FAX: +44 (0) 20 3475 6829

W: www.globaltccltd.com E: info@globaltccltd.com





Tim 55 aircraft tow tractor has draw bar pull 5500 kg (12,375lb-f) provide push back for private or regional aircraft with a MTOW upto 66,000 kg. It ensures greater visibility in all directions for safe operations.

STANDARD FEATURES INCLUDE

- 4 wheel suspension, leaf spring on rear and front axle.
- Disc brakes on front and rear wheels.
- Hydraulic power steering.
- Electronic control, fully automatic transmission
- Color coded and numbered plug & play wire harness.
- Recessed headlights.
- Emergency shutdown button.
- Seat belts.
- Rear light.
- Turn signals.
- Reverse gear horn.

SAFETY

Tim 55 complies below industrial standards
DIN EN 1915-1-2-3-4
DIN EN 12312-15,P
DIN EN 13490 (IT1 & IT2)
Emission level III A & EPA Tier III
CE certification
IATA AHM 910-913-915-916-968
ISO 1990 : 2008

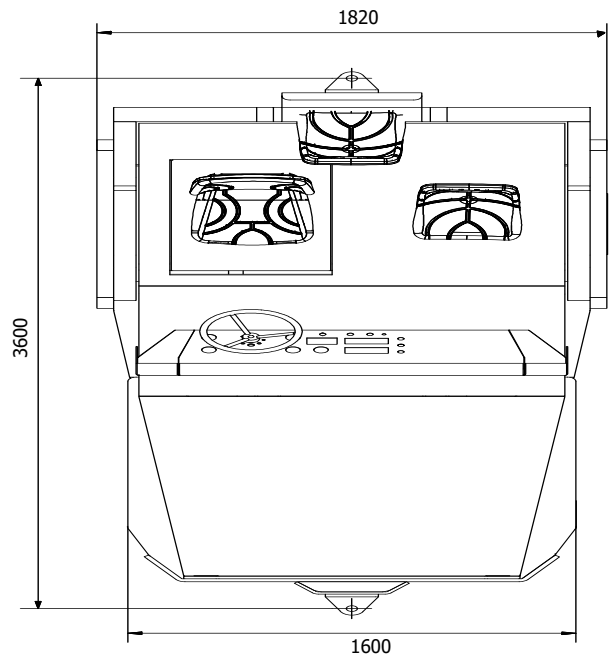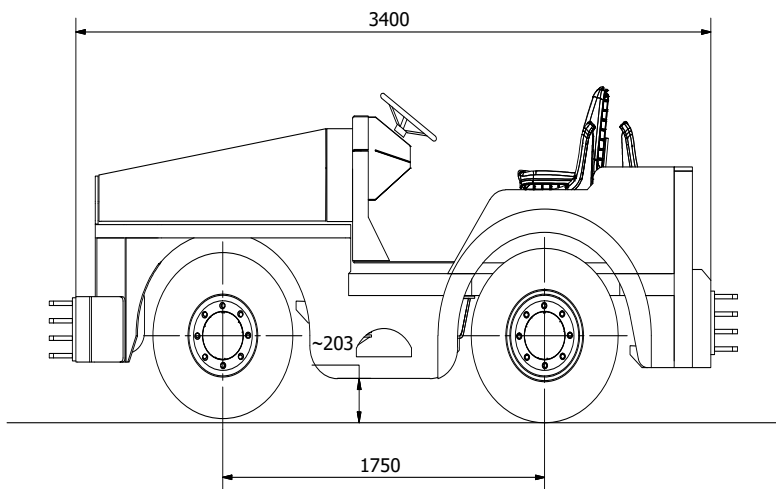

TECHNICAL DATA		TIM 55
LENGTH	MM	3400
WIDHT	MM	1820
WHEEL BASE	MM	1750
HEIGHT	MM	2100
TURNING RADIUS	MM	2800
GROUND CLEARANCE	MM	~203
WEIGHT (APPROX)	KG	7,500
ENGINE	EU	TCD 2011L 04W
ENGINE PERFORMANCE		74,9 KW@2600 RPM
TRANSMISSION		FULL AUTOMATIC TRANSMISSION
STEERING		HYDRAULIC POWERED ASSISTED STEERING
ELECTRICAL SYSTEM		12
TOWING CAPACITY (MAX)	KG	66,000
DRAWBAR PULL (MAX)	KN -(lb-f)	55-(12.375)
SPEED	KM/H	25-30
FUEL TANK CAPACITY	Lt	75
HYDRAULIC TANK CAPACITY	Lt	20
FRONT AXLE		STEERING AXLE-LEAF SPRING-SUSPENDED
REAR AXLE		DRIVING AXLE-LEAF SPRING-SUSPENDED AND SHOCK ABSSORBER
FRONT WHEEL		205/75R17.5
REAR WHEEL		8.50 R17.5 DUAL
SERVICE BRAKE		HYDRAULICALLY FORCED WITH DISC BRAKE ON ALL WHEELS
HAND BRAKE		MANUAL CONTROLLED

Specifications could be upgraded without prior notice & would be in corporated



**280A Whitton Avenue East Greenford Middx UB6 0JP
London United Kingdom
Tel: +44 (0) 203475 6819 FAX: +44 (0) 20 3475 6829
W: www.globaltccltd.com E: info@globaltccltd.com**